
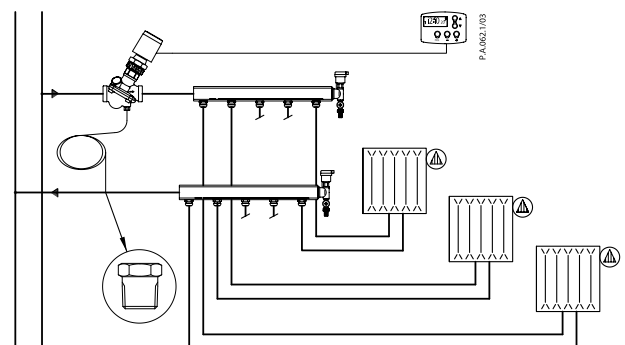
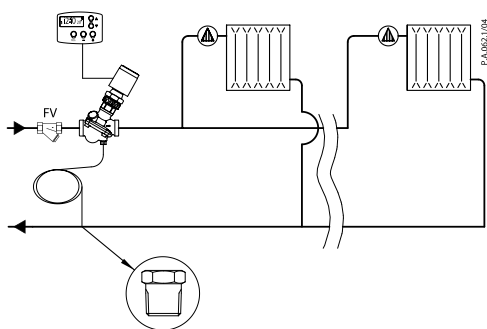
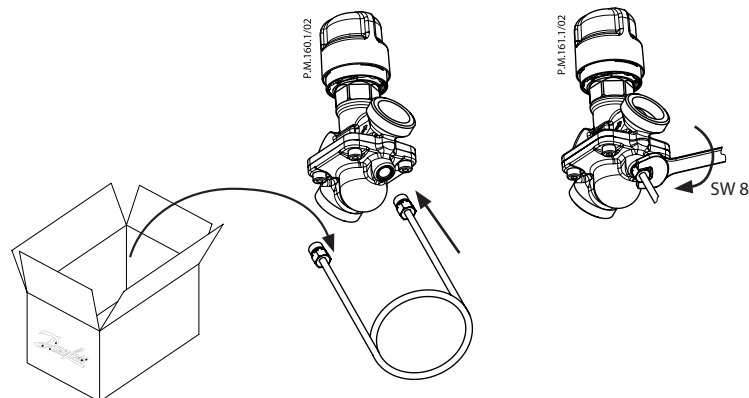
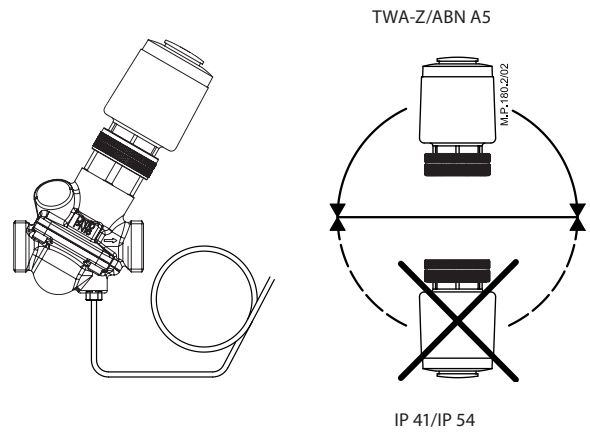


Operating Guide

AB-PM/AB-PM HP (DN 10-32) / 73693830

AB-PM/AB-PM HP (DN 10-32)


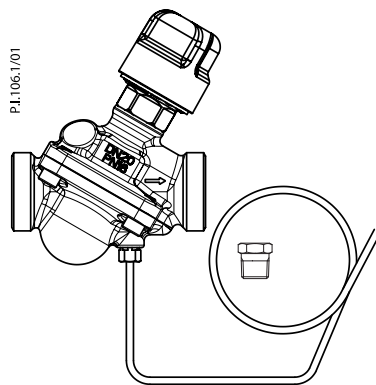


AB-PM/AB-PM HP (DN 10-32)


Manual Shut-off-plastic

Included with all AB-PM valves
 $\Delta p_{\max} = 1 \text{ bar}$


Code No.:
003Z0250

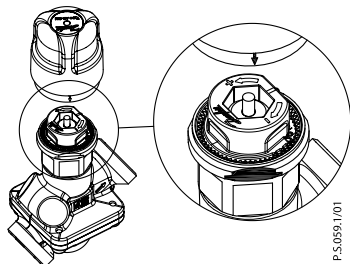


Mounting actuator

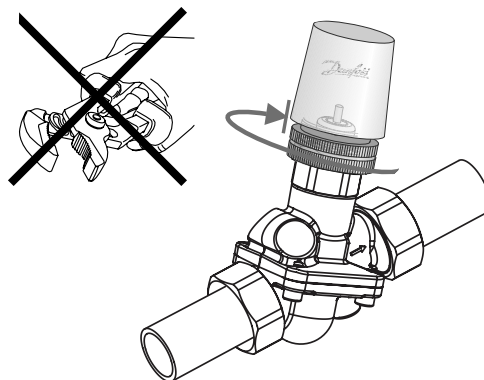

Flow Direction

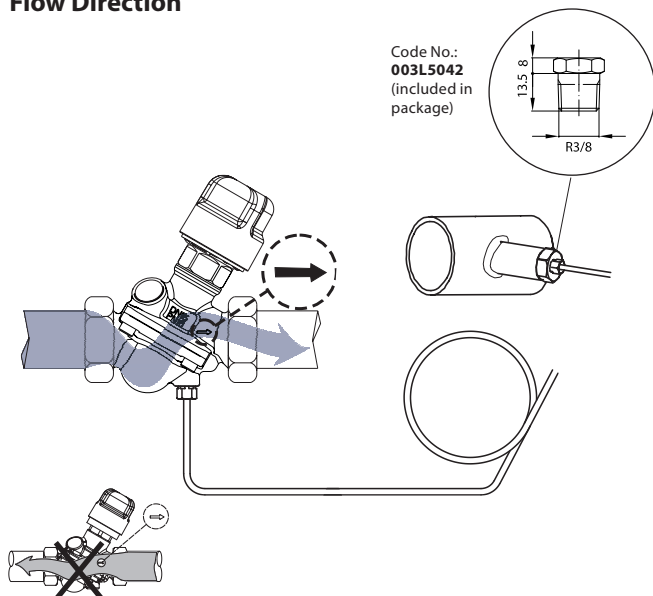


Assembly

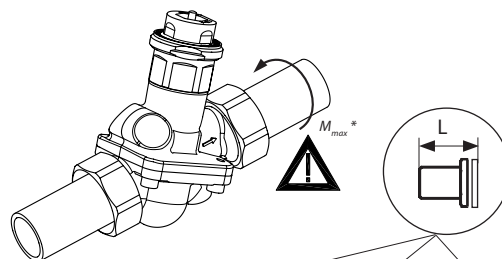


DN			Code No.			Code No.	Code No.
	To pipe	L (mm)		Weld.c. L (mm)	Code No.	Solder.c. L (mm)	
10*	R 3/8	26	003Z0231			17	065Z7016
15	R 1/2	27.5	003Z0232	37	003Z0226	22	065Z7017
20	R 3/4	30.5	003Z0233	42	003Z0227		
25	R 1	35	003Z0234	42	003Z0228		
32	R 1 1/4	38.5	003Z0235	42	003Z0229		

* $M_{\max}$ for DN 10 is 35 Nm

Locking

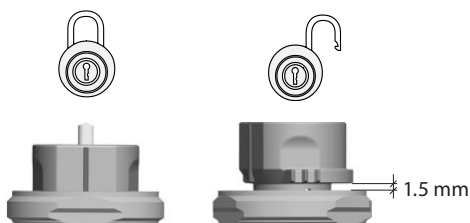

Setting

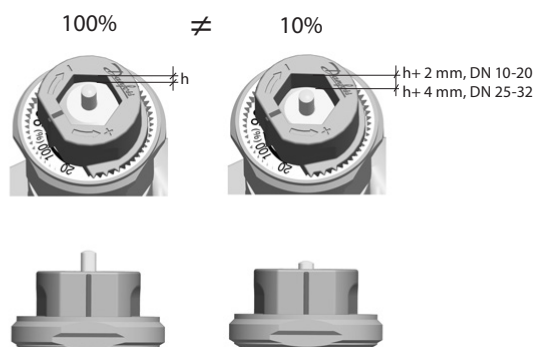

Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product manuals, catalogues descriptions, advertisements, etc. and whether made available in writing, orally, electronically, online or via download, shall be considered informative, and is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provided that such alterations can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.